



WB workbenches

The WB workbench has been designed for use in demanding assembly environments. The concept is one of simplicity and good ergonomics, allowing each bench to be adapted to a variety of tasks.

Electric motor, manual hand crank or allen key height adjustment cater for standing or seated users, while the generous worktop depth and broad accessory range ensure that everything is within easy reach. Another feature of this new design is the flush bench footprint; benches can be placed side-by-side, back-to-back, or right up against walls with no unnecessary gaps. You can design your workstation to fit your needs perfectly.

Worktop height can be adjusted between 700-1 100 mm. The adjustment system in both cases utilises interlocking aluminium profiles, providing a strong, rigid frame. Steel frame parts are epoxy powder coated light grey paint, RAL 7035. Worktops are of 25 mm laminated particle board, adjustable feet are provided for fine levelling.



- Ergonomic and easily adjustable
- Suitable for use in demanding assembly environments
- Adaptable to a large variety of tasks
- Offering a wide range of accessories to meet any need



WB benches examples



WB electric adjustable workbench

Qty	Name	Code
1	Electric adjustable bench	WB815 EL
1	Upright profiles	AL2X150 W
1	Accessory frame	AKK150
1	Shelf	ALH150
1	Support bracket	HSB150
1	Adjustable shelf	ASH70
1	Keyboard shelf	WKA
1	Overlight	OL254
1	Power channels	CJK70 SET
2	Bin profile	BP70
1	LCD bracket	MA
1	Light steel cabinet	LMC02
1	Cover	LMCK2



WB allen-key adjustable workbench

Qty	Name	Code
1	Allen-key adjustable bench	WB811
1	Upright profiles	AL2X110 W
1	Shelf	ALH110
1	Support bracket	HSB110
1	Overlight	OL254
1	Adjustable shelf	ASH100
1	Power channels	CJK100



WB electric adjustable workbench ESD

Qty	Name	Code
1	Electric adjustable bench	WB815 EL ESD
1	Upright profiles	AL2X150 W
1	Accessory frame	AKK150
1	Shelf	ALH150 ESD
2	Adjustable shelf	ASH70 ESD



WB allen-key adjustable workbench ESD

Qty	Name	Code
1	Allen-key adjustable bench	WB815 ESD
1	Upright profiles	AL2X150 W
1	Accessory frame	AKK150
1	Shelf	ALH150 ESD
1	Support bracket	HSB150
1	Overlight	OL254
1	Adjustable shelf	ASH70 ESD
1	Perforated panel	ARL70
1	Power channels	CJK70 SET
2	Sidelight	SL224



WB workbench



700-1100 mm



700-1100 mm



700-1100 mm

- Select the height adjustment method: allen-key, electric or crank.
- Stepless height adjustment between 700-1100 mm.
- Select a bench top to suit the frame: laminate or ESD bench top.

WB allen-key adjustable bench

Bench size W x D mm	Max load kg	Code	Code ESD
1073 x 800	250	WB811	WB811 ESD
1500 x 800	250	WB815	WB815 ESD
1800 x 800	250	WB818	WB818 ESD

WB electric adjustable bench

Bench size W x D mm	Max load kg	Code	Code ESD
1073 x 800	200	WB811 EL •	WB811 EL ESD •
1500 x 800	200	WB815 EL	WB 815 EL ESD
1800 x 800	200	WB818 EL	WB818 EL ESD

Adjustment speed using the motor is 19 seconds min. to max.

Cable tidy as standard.

WB crank adjustable bench

Bench size W x D mm	Max load kg	Code	Code ESD
1073 x 800	200	WB811 C •	WB811 C ESD •
1500 x 800	200	WB815 C	WB815 C ESD
1800 x 800	200	WB818 C	WB818 C ESD

Cable tidy as standard.


• = non stock item



CTR trolley


Height adjustment with allen key between 690-990 mm. A lower shelf is integrated. Swivel castors (Ø 100 mm), two of which have brakes. Dimensions 700 x 500 mm, lower shelf 700 x 415 mm.

Size W x D mm	Max load kg	Code	Code ESD
700 x 500	75 / shelf	CTR705	CTR705 ESD



Laminate bench top

- 25 mm low pressure laminate
- Light grey surface
- Plastic edging



ESD bench top

- Light grey laminate surface
- Grey edging
- Thickness 25 mm
- Fixed with screws
- Semi-conductive (ESD)



WB extension benches



1. WB side worktop

This side worktop can be installed on either the right or left hand side of an WB bench to increase the surface area. Installation can be either at the same height, or lower than the main worktop with the brackets provided. Load capacity is 50 kg, and it is suitable for all WB models in the range.

Size W x D mm	Max load kg	Code	Code ESD
400 x 800	50	WB804 ST	WB804 ST ESD

2. WB corner worktop

A corner worktop can be used with two WB benches to create a 90° angle setup. This unit consists of a worktop and all necessary components. It requires no additional leg frames, simply mounting to the standard benches with the brackets provided. Load capacity for this worktop is 50 kg. Doesn't suit handle adjustable bench. Suitable for WB EL to order.

Size W x D mm	Max load kg	Code	Code ESD
1154 x 1154	50	WB1212 CT	WB1212 CT ESD



Accessories for WB



Upright profiles AL2X

Upright profiles AL2X

Size W x H mm	Suitable for	Code	Code ESD
1063 x 900	WB811	AL2X110 W	AL2X110 W
1489 x 900	WB815	AL2X150 W	AL2X150 W
1789 x 900	WB818	AL2X180 W	AL2X180 W

Needed for mounting accessories to WB benches. Includes 2 vertical and 1 horizontal profile. With 3 cable clips (CC8).




Accessory frame AKK

Accessory frame AKK

Size W x D mm	Suitable for	Code	Code ESD
730 x 540	AL2X150 W AL2X180 W	AKK70	AKK70
690 x 500 + 690 x 500	AL2X150 W	AKK150	AKK150
690 x 500 + 990 x 500	AL2X180 W	AKK180	AKK180

The accessory frame divides the space between the upright profiles into 2 modules. AKK frame includes 1 vertical and 1 horizontal profile. Useable height 500 mm.

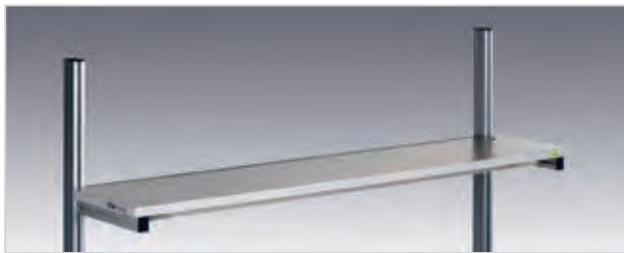

Shelf ALH

Shelf ALH

Size W x D mm	Suitable for	Code	Code ESD
1073 x 310	AL2X110 W, combination AL2X180 W + AKK180	ALH110	ALH110 ESD
1500 x 310	AL2X150 W	ALH150	ALH150 ESD
1800 x 310	AL2X180 W	ALH180	ALH180 ESD

Height adjustable shelf. 25 mm laminated particle board. Load capacity 50 kg. Mount on upright profiles.



Lower shelf AT

Lower shelf AT

Size W x D mm	Max load kg	Suitable for	Code	Code ESD
828 x 400 •	50	WB811	AT110 WB	AT110 WB ESD
1255 x 400 •	50	WB815	AT150 WB	AT150 WB ESD
1555 x 400 •	50	WB818	AT180 WB	AT180 WB ESD

Height adjustable lower shelf, 25 mm laminated particle board. Mount between the legs.

• = non stock item



Backstop LIST

Backstop LIST

Size W x D x H mm	Suitable for	Code
1400 x 52 x 27	ALH150, AT150 WB, AT150 TPH	LIST150
1700 x 52 x 27	ALH180, AT180 WB, AT180 TPH	LIST180

Prevents items from falling off the shelf. Can be fixed on the lower shelf AT or on the shelf ALH.

Divider hoops PDH

Height mm	Suitable for	Code	Code ESD
330	ALH	PDH	PDH

Used in combination with shelf ALH. Comes in sets of 5.



Divider hoops PDH

Perforated panel ARL

Size W x H mm	Suitable for	Code	Code ESD
668 x 500	AKK70, AKK150	ARL70	ARL70
968 x 500	AKK180	ARL100	ARL100

Mount on accessory frame AKK. The size of the perforation is 9 x 9 mm, center to center 38 mm.




Perforated panel ARL

Adjustable shelf ASH

Size W x D mm	Suitable for	Code	Code ESD
660 x 400	AKK70, AKK150, AKK180	ASH70	ASH70 ESD
960 x 400	AKK180	ASH100	ASH100 ESD

Continuous adjustment for depth, height and angle. Shelf of 25 mm laminated particle board. Lipped front edge. Load capacity 35 kg static load. Mount on accessory frame AKK.

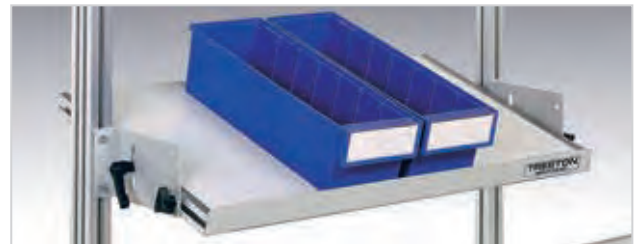

Adjustable shelf ASH

Bin profile BP

Length mm	Suitable for	Code	Code ESD
685	AKK 70, AKK150, AKK180	BP70	BP70 ESD
985	AKK180	BP100	BP100 ESD

Aluminium profile for stacking and picking bins. Mount on accessory frame AKK.



Bin profile BP

Swivel arm with tray AKV

Size W x D mm	Suitable for	Code	Code ESD
460 x 210 (tray)	AL2X upright profiles	AKV400	AKV400 ESD

Lockable, angle adjustable steel tray with swivel radius of 360°. Length of swivel arm 590 mm. Max. load 15 kg.



Swivel arm with tray AKV

Component rack EPL

Size W x D x H mm	Suitable for	Shelves number	Code ESD
455 x 200 x 290	AKV	3	EPL12 ESD

Rack with three fixed shelves. Semiconductive epoxy powder coated steel in light grey (RAL 7035). Bins ordered separately, page 36.

Component rack holds:

- 12 stacking bins 1015-4ESD or 12 picking bins 30-1L-4ESD or 6 picking bins 30-2L-4ESD or 6 picking bins 30-23L-4ESD.



Component rack EPL

Document stand WDA

Size W x H mm	Suitable for	Code	Code ESD
440 x 300	AL2X upright profiles	WDA	WDA ESD

Document stand A3 with swivel arm. Epoxy powder coated steel: light grey. Arm length 220 mm. Tilt 75°.



Document stand WDA



Bottle holder CH

Bottle holder CH

Size W x D x H mm	Ø mm	Suitable for	Code	Code ESD
110 x 105 x 120	80	AL2X upright profiles	CH	CH

Practical holder for bottle or cup. Made of black polypropylene.



Recycling material bin PRMB

Recycling material bin PRMB

Size W x D x H mm	Suitable for	Code
530 x 280 x 585	WB benches	PRMB2
530 x 280 x 585	TP benches	PRMB

The 60 ltr bin with steel brackets has a maximum load of 15 kg and can be positioned on either side or rear of the bench.



Tool holder box PPH

Tool holder box PPH

Size W x D x H mm	Suitable for	Code
400 x 300 x 140	WB and TP benches	PPH TXL
186 x 500 x 182	WB and TP benches	PPH TL

PPH TXL with two grey plastic bins type 3020 and the PPH TL with one red plastic bin type 1950.



Tool tray PTH

Tool tray PTH

Size W x D mm	Suitable for	Code
1000 x 60	WB benches	PTH100

The tool tray guarantees a clean working space, while tools are close to hand.




Support bracket HSB

Support bracket HSB

Length mm	Suitable for	Code	Code ESD
1073	AL2X110 W	HSB110	HSB110
1500	AL2X150 W	HSB150	HSB150
1800	AL2X180 W	HSB180	HSB180

Support bracket of steel for suspending power tools and lighting units. Mount on upright profiles.

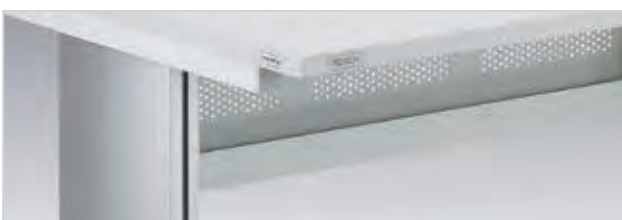

Cable tidy WBCT

Cable tidy WBCT

Size W x D x H mm	Suitable for	Code	Code ESD
948 x 64 x 204 •	WB811	WBCT110	WBCT110
1375 x 64 x 204	WB815	WBCT150	WBCT150
1675 x 64 x 204	WB818	WBCT180	WBCT180

Mount on leg frame. A cable tidy is standard equipment on WB C and WB EL models.

• = non stock item

Cable clip set CC

Set	Suitable for	Code	Code ESD
5 pieces	AL2X upright profiles	CC8	CC8

The cable clip set will hold cables etc. securely and neatly in place along the bench frame. The clips locate in the 8 mm profile slot.



Cable clip set CC

Keyboard shelf WKA

Size W x D mm	Suitable for	Code	Code ESD
500 x 220 (shelf)	AL2X upright profiles	WKA	WKA ESD

Keyboard shelf with swivel arm. Epoxy powder coated steel. Load capacity 15 kg. Arm length 220 mm.



Keyboard shelf WKA

PC stand CPU

Width	Height	Suitable for	Code
130-240 mm	395-500 mm	WB and TP/TPH benches	CPU
340-460 mm	180-285 mm	SAP, CTR, WTR trolleys	

An adjustable holder for either vertical or horizontal CPU, to mount underneath the table worktop.



PC stand CPU

LCD bracket MH

Max load kg	Suitable for	Code
15	AL2X upright profiles	MH

The quick-release mechanism is equipped with the standard used flat-screen mount 75 x 75 and 100 x 100 for the mounting of all normal flat-screens.



LCD bracket MH

LCD swivel arm MA

Max load kg	Suitable for	Code
10	AL2X upright profiles	MA

The quick-release mechanism is equipped with the standard flat-screen mount 75 x 75 and 100 x 100 for the mounting of all normal flat-screens. The arm is double articulated, turns through a radius of 180° and will extend between 95-425 mm from the upright.



LCD swivel arm MA

LCD swivel arm MA2

Max load kg	Suitable for	Code
15	AL2X upright profiles	MA2

The quick-release mechanism is equipped with the standard, widely used flat-screen mount 75 x 75 and 100 x 100 for the mounting of all normal flat-screens. The arm is double articulated, turns through a radius of 180° and will extend between 95-425 mm from the upright.



LCD swivel arm MA2

Power channels CJK

Dims mm	Suitable for	Code
Profile 631	AL2X upright profiles	CJK70
Profile 931	AL2X upright profiles	CJK100
3 double sockets (E1) and a switch (E2)		CJK70 SET
Double socket		E1
Switch		E2
Automatic fuse 10 A		E3
Automatic fuse/earth leakage switch 10 A/30 mA		E4
Emergency-stop-switch		E5
Data connector/shielded for Cat.6 cable		E6
Data connector/without screen for Cat.5 cable		E7
Pneumatic, quick coupling 3/8"		E8

Can be fitted with a choice of components, ordered separately. All meet with CE requirements. 3 m cable is included. Supplied wired and ready for use. A finished CJK 70 SET includes 3 double sockets (E1) and a switch (E2). Other sets are also available.



CJK70 SET